

Electro-pneumatic cutting-off machine, single head, retractable blade, with automatic blade advancement and inclination. Designed to perform rh and lh cuts at 20° and intermediate positions on aluminium section bars.

TECHNICAL CHARACTERISTICS

Disk Ø 450 mm
Three phase motor
220/380 V 50 Hz
Oil mist pneumatic lubrication
Operating pressure: 6-8 atm

THE MACHINE INCLUDES:

- Disk Ø 450 mm
 - Service spanners
- OPTIONAL:**
- Single phase motor
 - Full protection
 - Vertical vice




Overall dimensions:
850 x 1450 x 1500 H mm.



Weight 350 kg approx.

THE MACHINE IS EQUIPPED WITH SAFETY DEVICES TO ELIMINATE ALL DANGERS TO THE OPERATOR

Data, description, and illustrations are for indication only.

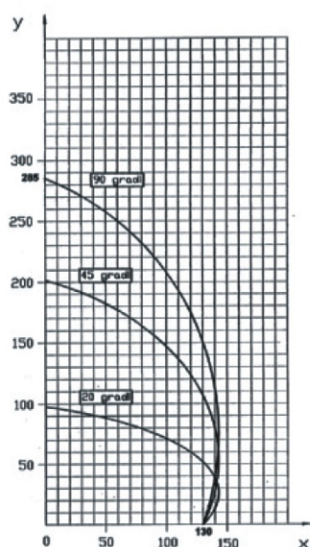

The specifications and illustrations in this catalogue are only a guide, Dynamic Machines Services Sdn Bhd therefore reserves the right to make any modifications it deems necessary for technical or commercial reasons.