
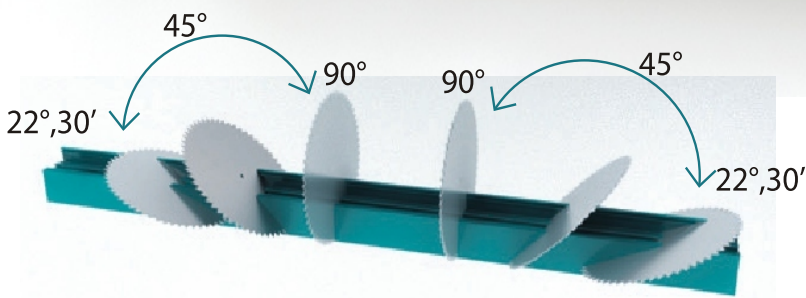



## CUTTING-OFF MACHINE | NOVA 600 C Double Mitre Cutting-off Machine

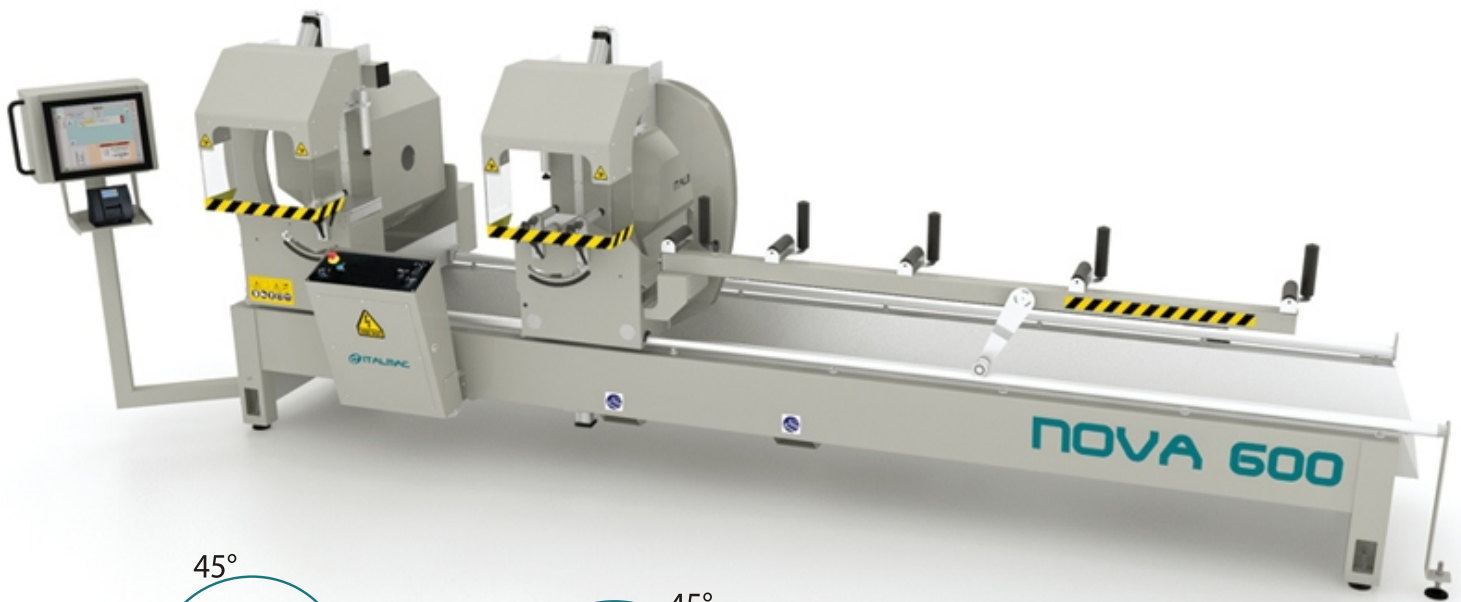



Double mitre cutting-off machine with automatic right head movable by numeric control. External pneumatic tilting of both heads to 90°, 45°, 22°30' with mechanical stops for intermediate degrees. Sawblade diam. 600 mm available with maximum cutting length of 4 and 5 meters.

### Technical features:

- N. 2 saw blades diam. 600 mm.
- USB port.
- Pneumatic vertical and horizontal clamps.
- Protection of the blades.
- Movable side profile support roller conveyor.
- Software single cut, minimum cut, oversize cut and step-by-step cuts.
- NOVA 600-P: with control panel, 7" colour display touch screen.
- NOVA 600-C: with industrial PC, 17" LED colour screen.

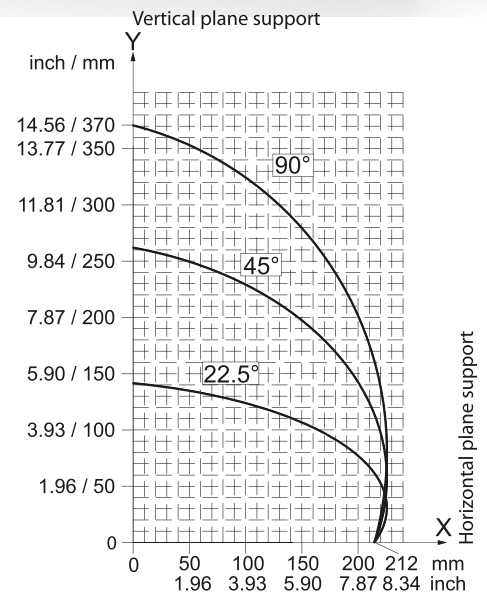

NOVA 600 cutting diagram

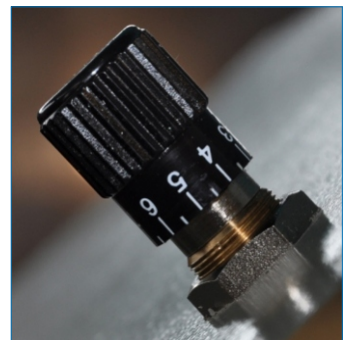

| Models     | Maximum cutting  | Minimum cutting                                        | Dimension                        | Weight            | kW  |
|------------|------------------|--------------------------------------------------------|----------------------------------|-------------------|-----|
| NOVA 600/P | 4000 mm - 158 in | 380 mm - 15 in (45° - 90°) / 450 mm - 17.7 in (22°30') | 7800x1650x1950 mm - 308x65x77 in | 1600 kg - 3520 lb | 6,5 |
| NOVA 600/P | 5000 mm - 197 in | 380 mm - 15 in (45° - 90°) / 450 mm - 17.7 in (22°30') | 8800x1650x1950 mm - 347x65x77 in | 1700 kg - 3740 lb | 6,5 |
| NOVA 600/C | 4000 mm - 158 in | 380 mm - 15 in (45° - 90°) / 450 mm - 17.7 in (22°30') | 8250x1800x1950 mm - 325x71x77 in | 1650 kg - 3630 lb | 6,5 |
| NOVA 600/C | 5000 mm - 197 in | 380 mm - 15 in (45° - 90°) / 450 mm - 17.7 in (22°30') | 9250x1800x1950 mm - 365x71x77 in | 1750 kg - 3850 lb | 6,5 |

Options: Profile central support pneumatically set; Clamp and support for automatic step by step cutting system; Movable console; Chips conveyor plate; Electronic profile thickness gauge; Driver for network connection; Label printer complete with software.

The specifications and illustrations in this catalogue are only a guide, Dynamic Machines Services Sdn Bhd therefore reserves the right to make any modifications it deems necessary for technical or commercial reasons.